

dinamic



dinamic



dinamic





Dinamic plus


Technical data

	Ref.					White & Colors				Chrome & Galvanics			Weight kg	Cap. lt	Esp. “n”
		A mm	B mm	C mm	Elem. n.	Δt = 50° W	Δt = 30° W	Heater for mixed W		Δt = 50° W	Δt = 30° W	Heater for mixed W			
900	SED093050	929	500	450	19	423	230	300	Min. (Pannello chiuso)	282	153		9,0	4,6	1,20
						473	257		MAX.(Pannello aperto)	315	171				
1200	SED121050	1209	500	450	25	559	301	500	Min. (Pannello chiuso)	373	201	300	11,4	5,9	1,21
						609	329		MAX.(Pannello aperto)	406	219				
1500	SED145050	1454	500	450	32	680	365	750	Min. (Pannello chiuso)	453	243	500	13,7	7,6	1,22
						730	392		MAX.(Pannello aperto)	487	261				

kcal/h = 0,86 x Watt


WALL FASTENING SYSTEMS

Fissaggi a parete
Systèmes d'installation murale
Sistemas de fijación a la pared




RADIATOR BODY DIMENSIONS

Dimensioni corpo
Dimensions du corps chauffant
Dimensiones del cuerpo calefactor



INSTALLATION WITH HEATER AND "T"

Installazione versione mista con "T"
Installation avec résistance électrique et "T"
Instalación con resistencia eléctrica y "T"




Raccordo a "T"
"T" fitting
Raccord en "T"
Conexión en "T"


Resistenza con termostato
Resistance with thermostat
Résistance avec thermostat
Resistencia con termostato

A = altezza; B = larghezza; C = interasse
A = height; B = width; C = interaxis
A = hauteur; B = largeur; C = entraxe
A = altura; B = ancho; C = entre ejes


[mm]

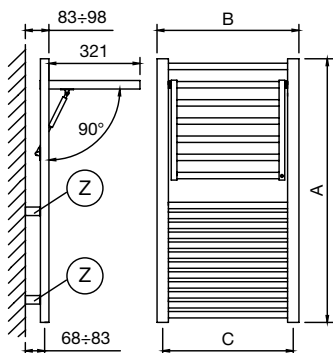

Mod. SED 093050

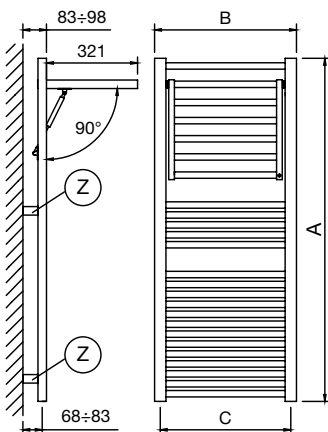

Mod. SED 121050

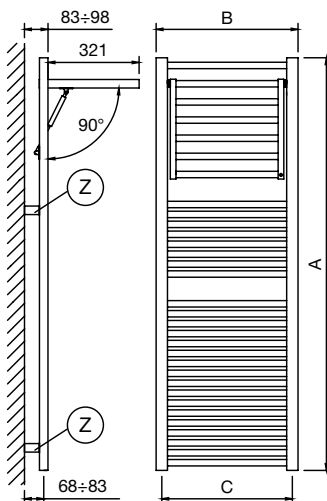

Mod. SED 145050

TECHNICAL NOTES

Temperatura max di esercizio: 90 °C
Maximum operating temperature: 90 °C
Température maximum de fonctionnement: 90 °C
Temperatura máx de funcionamiento: 90 °C


Non disponibile per impianto monotubo
Not available for single-pipe system
Non disponible pour installation mono-tube
No está disponible para instalación monotubo

Pressione max di esercizio: 500 kPa
Maximum operating pressure: 500 kPa
Pression maximum de fonctionnement: 500 kPa
Presión máx de funcionamiento: 500 kPa

Consultare note tecniche di dettaglio pag. 158
Please consult technical notes on page 160
Consulter renseignements techniques détaillés à la pag. 162
Consulte las informaciones técnicas detalladas pag. 164



White
Standard
Deltacolor white



Chrome

Pastels

Coarse or Matt


9016

Traffic white



1013

Oyster white



1019

Grey beige




7006

Beige grey



7030

Stone grey



7047

Telegrey 4



7040

Window grey



7043

Traffic grey B



9005

Jet black




Specials

Coarse



7048

Pearl mouse grey



2


Quartz sand



6

Quartz gray

by
Andrea Castiglione



10

Army



11

Petrol



12

Laguna



13

Balena



14

Rouille

Plate Lux

(Inox Steel Cover)

Flowered



Gold mirror



Black mirror



Copper mirror




Galvanics

Glossy or Matt



British Gold



Bronze Copper



Astana Brass

colors

Non considerare i colori perfettamente fedeli per limiti di stampa e illuminazione.

Do not consider colors as exactly trustable because of printing and light limits.

Ne pas considérer les couleurs comme exactement correspondants suite à limites de imprimerie et de lumière.

No tenir en consideracion los colores como perfectamente igual para limitaciones de imprenta y de luz.



DELTACALOR

Company profile

Quality made in Italy

The company was founded in the mid-nineties with a traditional handcraft steel towel rail production. In 2002 the company was transformed into a real industrial reality, following the acquisition of an important group in view of the plumbing and heating sector led by CEO Giovanni Pastorino who decides to revive the company renewing its product range with new ranges of hydraulic, mixed and electrical steel towel warmers and radiators with exclusive technology and design. Deltacalor is strongly characterized by a 360° approach that incorporates technology, practicality and aesthetics. The constant Research and Development on materials, shapes, finishes and processes leads the company to the launch of major patented products, tangible evidence of real and concrete innovations. Not only the heating elements, but also expression of an innate attitude in the search of the best way to provide comfort and well-being at the service of man. High functionality, energy saving, easy installation, high quality are, in fact, the advantages of a production able to meet and anticipate the needs of designers, architects, installers and end users.





DELTACALOR

Company profile

Production takes place in Italy

Production takes place in Italy, in the state of the art plant of Calolziocorte (LC), on a surface of approximately 10,000 sqm. We use the most innovative and advanced production methods: from welding to painting, to a well established quality control system based on the highest market standards. Production know-how is one of Deltacalor strengths: the company can produce a high number of parts using highly automated systems, but is also capable of meeting the different degrees of customisations that the market requires. All this, with the utmost attention to process control, ensured by a team of experienced professionals.

Deltacalor takes advantage of a young and dynamic workforce of 50 employees, capable of meeting all the needs of our customers, and ready to take on the challenges of the market. This is the winning combination of the company that always ensures precise and timely service.

