

hego 13



hego 13



hego | 3





technical data hego 13

Ref.	A	B	C	White & Colors		Chrome		Weight	Cap.	
				$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$			
				W	W	W	W			
770 32 pipes Rohre tubes tubos	HG13076045	762	455	420	402	220	282	154	7,4	2,11
	HG13076050	762	505	470	439	240	307	168	8,1	2,24
	HG13076060	762	605	570	511	279	358	195	9,5	2,51
	HG13076075	762	755	720	619	337	434	237	11,5	2,91
1200 48 pipes Rohre tubes tubos	HG13119045	1192	455	420	578	315	405	221	11,2	3,08
	HG13119050	1192	505	470	629	343	440	240	12,2	3,27
	HG13119060	1192	605	570	730	397	512	279	14,3	3,65
	HG13119075	1192	755	720	883	480	619	336	17,3	4,22
1500 57 pipes Rohre tubes tubos	HG13148045	1482	455	420	693	377	485	264	13,4	3,74
	HG13148050	1482	505	470	753	410	527	287	14,7	3,97
	HG13148060	1482	605	570	874	475	612	333	17,1	4,41
	HG13148075	1482	755	720	1056	573	739	401	20,7	5,08
1800 66 pipes Rohre tubes tubos	HG13177045	1772	455	420	808	439	565	307	15,7	4,40
	HG13177050	1772	505	470	878	477	615	334	17,1	4,66
	HG13177060	1772	605	570	1018	552	713	387	19,9	5,18
	HG13177075	1772	755	720	1228	664	860	465	24,1	5,95

Recommended Resistances
Erforderliche Widerstände
Résistances Conseillées
Resistencias Recomendadas


300W	500W	750W	1000W
● x			
● x			
x	●		
x	●		
		●	
		●	
		x	
		x	
			●
			●
		x	●
		x	●

kcal/h = 0,86 x Watt

● White & Color
x Chrome


Wall fastening systems

Befestigungssysteme an der Wand
Systèmes d'installation murale
Sistemas de fijación a la pared

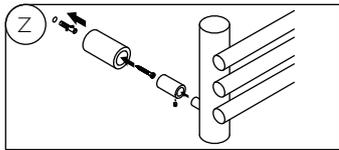


Radiator body dimensions

Größe des Heizkörpers
Dimensions du corps chauffant
Dimensiones del cuerpo calefactor

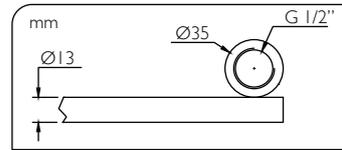

Installation with heating element and "T"

Installation gemischter Ausführung mit "T"
Installation avec résistance électrique et "T"
Instalación con resistencia eléctrica y "T"

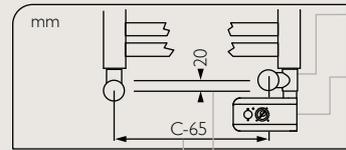


"T" fitting
T-Stück
Raccord en "T"
Conexión en "T"

Resistance with thermostat
Widerstand mit Thermostat
Résistance avec thermostat
Resistencia con termostato

Modification of interaxis with "T" fitting
Achsabstandänderung durch T-Stück
Variation interaxe avec raccord "T"
Variación entreje con rácor en "T"

Measures in mm: A=height B=width C=interaxis
Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
Mesures en mm: A=hauteur B=largeur C=entraxe
Medidas en mm: A=altura B=ancho C=entre eje

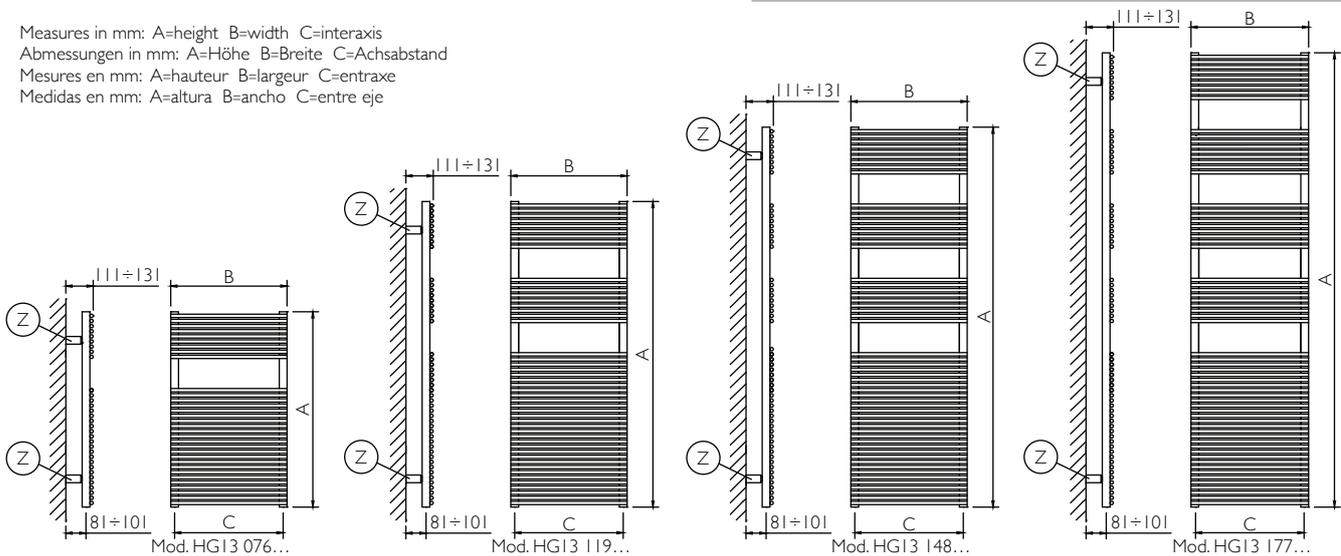

technical notes

Maximum operating temperature: 90 °C

Max. Betriebstemperatur: 90° C

Température maximum de fonctionnement: 90 °C

Temperatura máx de funcionamiento: 90 °C

Maximum operating pressure: 500 kPa

Max. Betriebsdruck: 500 kPa

Pression maximum de fonctionnement: 500 kPa

Presión máx de funcionamiento: 500 kPa



Wall fastening systems are white for "9010" version, chromed for "chrome" & "colors" versions

Die Befestigungselemente sind für die Ausführung "9010" weiß und für Ausführungen "chrome & colours" verchromt

Les systèmes d'installation sont blancs pour la version "9010", chromés pour les versions "chrome" & "colors"

Los sistemas de fijación son blancos para la versión "9010", cromados para las versiones "chrome" & "colors"

For single pipe installation, please consult technical notes Pag.323

Bei dem Einrohrsystem lesen Sie die technischen Daten auf Seite 325

Pour installation monotube consulter les renseignements techniques détaillés Pag. 327

Para instalaciones monotubo consulte las informaciones técnicas detalladas Pag. 329




DELTACALOR

Company profile

Quality made in Italy

The company was founded in the mid-nineties with a traditional handcraft steel towel rail production. In 2002 the company was transformed into a real industrial reality, following the acquisition of an important group in view of the plumbing and heating sector led by CEO Giovanni Pastorino who decides to revive the company renewing its product range with new ranges of hydraulic, mixed and electrical steel towel warmers and radiators with exclusive technology and design. Deltacalor is strongly characterized by a 360° approach that incorporates technology, practicality and aesthetics. The constant Research and Development on materials, shapes, finishes and processes leads the company to the launch of major patented products, tangible evidence of real and concrete innovations. Not only the heating elements, but also expression of an innate attitude in the search of the best way to provide comfort and well-being at the service of man. High functionality, energy saving, easy installation, high quality are, in fact, the advantages of a production able to meet and anticipate the needs of designers, architects, installers and end users.

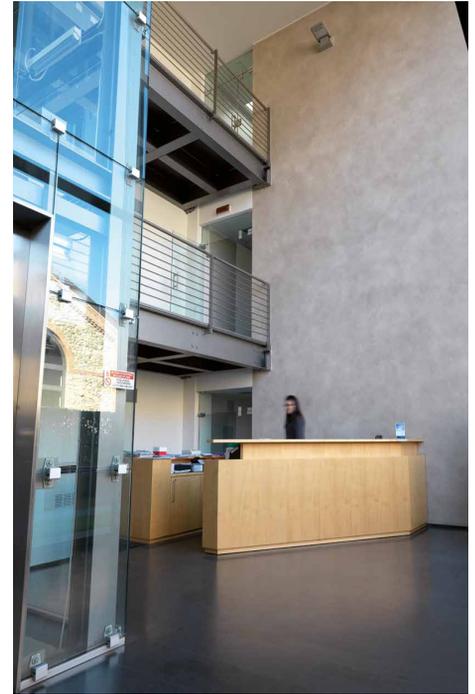



DELTACALOR

Company profile

Production takes place in Italy

Production takes place in Italy, in the state of the art plant of Calolziocorte (LC), on a surface of approximately 10,000 sqm. We use the most innovative and advanced production methods: from welding to painting, to a well established quality control system based on the highest market standards. Production know-how is one of Deltacalor strengths: the company can produce a high number of parts using highly automated systems, but is also capable of meeting the different degrees of customisations that the market requires. All this, with the utmost attention to process control, ensured by a team of experienced professionals.

Deltacalor takes advantage of a young and dynamic workforce of 50 employees, capable of meeting all the needs of our customers, and ready to take on the challenges of the market. This is the winning combination of the company that always ensures precise and timely service.



color chart

9010
Pure white



Chrome



colors

Non considerare i colori perfettamente fedeli per limiti di stampa e illuminazione.

Do not consider colors as exactly trustable because of printing and light limits.

Die Farben sind wegen licht und druckbeschränkungen nicht genau zu betrachten.

Ne pas considérer les couleurs comme exactement correspondants suite à limites de imprimerie et de lumière.

No tenir en consideracion los colores como perfectamente igual para limitaciones de imprenta y de luz.

PASTELS

9016
Traffic white



1013
Oyster white



1015
Light ivory



1019
Grey beige



7006
Beige grey



7030
Stone grey



7047
Telegrey 4



7040
Window grey



7043
Traffic grey B



8019
Grey brown




9005
Jet black



COARSE

GLOSSY

MATT



SPECIALS

9006
White aluminium



9007
Grey aluminium



7048
Pearl mouse grey



1
Quartz cream



2
Quartz sand



3
Quartz stone



4
Quartz sugar paper



5
Corten steel



6
Quartz gray



7
Quartz black



COARSE

GLOSSY

MATT