

hego23



hego23






	Ref.	A	B	C	White & Colors		Chrome		Weight	Cap.	Recommended Resistances			
					$\Delta t=50^\circ\text{C}$	$\Delta t=30^\circ\text{C}$	$\Delta t=50^\circ\text{C}$	$\Delta t=30^\circ\text{C}$			300W	500W	750W	1000W
770 18 pipes Rohre tubes tubos	HG23077045	770	455	420	403	220	270	148	6,5	3,6	● x			
	HG23077050	770	505	470	442	241	296	162	7,1	3,9	● x			
	HG23077060	770	605	570	521	284	349	191	8,3	4,5	x	●		
	HG23077075	770	755	720	639	348	428	233	10,0	5,4	x	x	●	
1200 27 pipes Rohre tubes tubos	HG23120045	1177	455	420	585	319	392	214	9,8	5,5	x	●		
	HG23120050	1177	505	470	644	351	431	235	10,7	5,9	x	●		
	HG23120060	1177	605	570	761	414	510	278	12,5	6,8	x	x	●	
	HG23120075	1177	755	720	936	509	627	341	15,1	8,2	x	x	●	
1500 34 pipes Rohre tubes tubos	HG23150045	1510	455	420	759	413	509	277	12,4	6,9	x	●		
	HG23150050	1510	505	470	831	452	557	303	13,5	7,5	x	●		
	HG23150060	1510	605	570	975	530	653	355	15,7	8,6	x	x	●	
	HG23150075	1510	755	720	1191	646	798	433	19,0	10,3	x	x	●	
1800 42 pipes Rohre tubes tubos	HG23181045	1806	455	420	868	472	582	316	15,3	8,5	x	●		
	HG23181050	1806	505	470	955	519	640	348	16,6	9,2	x	x	●	
	HG23181060	1806	605	570	1130	613	757	411	19,3	10,6	x	x	●	
	HG23181075	1806	755	720	1391	752	932	504	23,4	12,7	x	x	●	

kcal/h = 0,86 x Watt

● White & Color
x Chrome


Wall fastening systems

Befestigungssysteme an der Wand
Systèmes d'installation murale
Sistemas de fijación a la pared




Radiator body dimensions

Größe des Heizkörpers
Dimensions du corps chauffant
Dimensiones del cuerpo calefactor



Installation with heating element and "T"

Installation gemischter Ausführung mit "T"
Installation avec résistance électrique et "T"
Instalación con resistencia eléctrica y "T"






"T" fitting
T-Stück
Raccord en "T"
Conexión en "T"

Resistance with thermostat
Widerstand mit Thermostat
Résistance avec thermostat
Resistencia con termostato

Modification of interaxis with "T" fitting
Achsabstandänderung durch T-Stück
Variation interaxe avec raccord "T"
Variación entreje con rácor en "T"

Measures in mm: A=height B=width C=interaxis
Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
Mesures en mm: A=hauter B=largeur C=entraxe
Medidas en mm: A=altura B=ancho C=entre eje

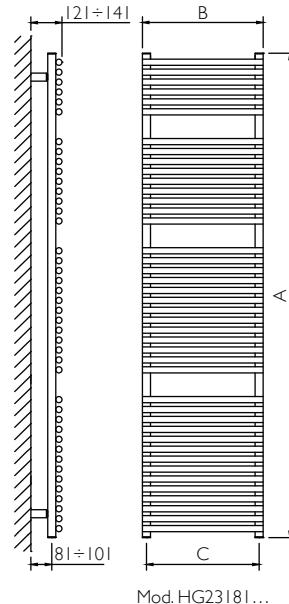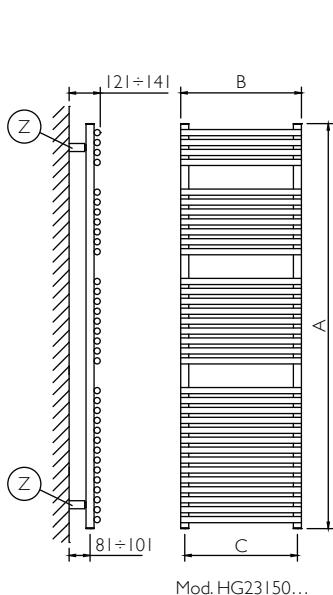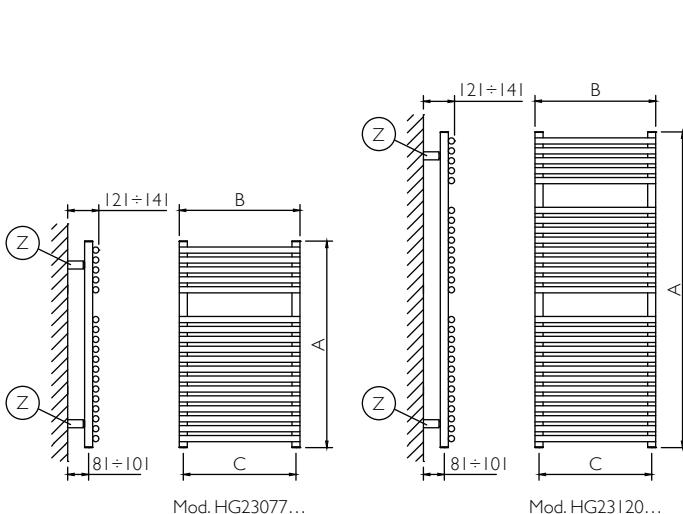

technical notes

Maximum operating temperature: 90 °C

Max. Betriebstemperatur: 90° C

Température maximum de fonctionnement: 90 °C

Temperatura máx de funcionamiento: 90 °C

Maximum operating pressure: 500 kPa

Max. Betriebsdruck: 500 kPa

Pression maximum de fonctionnement: 500 kPa

Presión máx de funcionamiento: 500 kPa

Wall fastening systems are white for "9010" version, chromed for "chrome" & "colors" versions

Die Befestigungselemente sind für die Ausführung "9010" weiß und für Ausführungen "chrome & colours" verchromt

Les systèmes d'installation sont blancs pour la version "9010", chromés pour les versions "chrome" & "colors"

Los sistemas de fijación son blancos para la versión "9010", cromados para las versiones "chrome" & "colors"

For single pipe installation, please consult technical notes Pag.323

Bei dem Einrohrsystem lesen Sie die technischen Daten auf Seite 325

Pour installation monotube consulter les renseignements techniques détaillés Pag. 327

Para instalaciones monotubo consulte las informaciones técnicas detalladas Pag. 329






DELTACALOR

Company profile

Quality made in Italy

The company was founded in the mid-nineties with a traditional handicraft steel towel rail production. In 2002 the company was transformed into a real industrial reality, following the acquisition of an important group in view of the plumbing and heating sector led by CEO Giovanni Pastorino who decides to revive the company renewing its product range with new ranges of hydraulic, mixed and electrical steel towel warmers and radiators with exclusive technology and design. Deltacalor is strongly characterized by a 360° approach that incorporates technology, practicality and aesthetics. The constant Research and Development on materials, shapes, finishes and processes leads the company to the launch of major patented products, tangible evidence of real and concrete innovations.

Not only the heating elements, but also expression of an innate attitude in the search of the best way to provide comfort and well-being at the service of man. High functionality, energy saving, easy installation, high quality are, in fact, the advantages of a production able to meet and anticipate the needs of designers, architects, installers and end users.

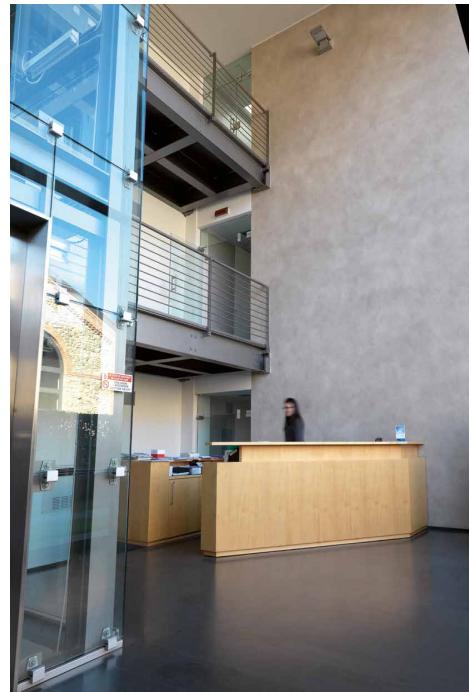




DELTACALOR

Company profile

Production takes place in Italy

Production takes place in Italy, in the state of the art plant of CalolzioCorte (LC), on a surface of approximately 10,000 sqm. We use the most innovative and advanced production methods: from welding to painting, to a well established quality control system based on the highest market standards. Production know-how is one of Deltacalor strengths: the company can produce a high number of parts using highly automated systems, but is also capable of meeting the different degrees of customisations that the market requires. All this, with the utmost attention to process control, ensured by a team of experienced professionals.

Deltacalor takes advantage of a young and dynamic workforce of 50 employees, capable of meeting all the needs of our customers, and ready to take on the challenges of the market. This is the winning combination of the company that always ensures precise and timely service.

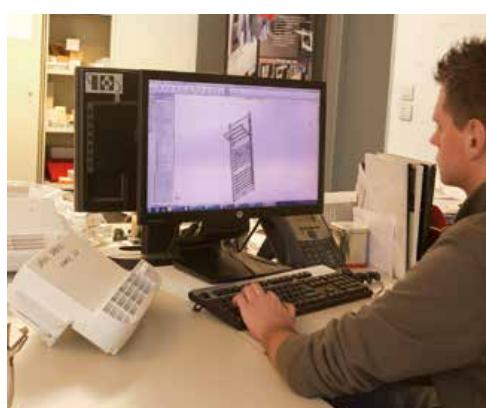

color chart

9010
Pure white



Chrome



colors

Non considerare i colori perfettamente fedeli per limiti di stampa e illuminazione.

Do not consider colors as exactly trustable because of printing and light limits.

Die Farben sind wegen licht und druckbeschräkungen nicht genau zu betrachten.

Ne pas considérer les couleurs comme exactement correspondants suite à limites de imprimerie et de lumière.

No tener en consideracion los colores como perfectamente igual para limitaciones de imprenta y de luz.

PASTELS

9016
Traffic white

COARSE



GLOSSY



MATT



1013
Oyster white



1015
Light ivory



1019
Grey beige



7006
Beige grey



7030
Stone grey



7047
Telegrey 4



7040
Window grey



7043
Traffic grey B



8019
Grey brown



9005
Jet black



SPECIALS

9006
White aluminium

COARSE



GLOSSY



MATT



9007
Grey aluminium



7048
Pearl mouse grey



1
Quartz cream



2
Quartz sand



3
Quartz stone



4
Quartz sugar paper



5
Corten steel



6
Quartz gray



7
Quartz black

