

# stendy



# stendy



# stendy





# technical data stendy


Ref.	A mm	B mm	C mm	White & Colors				Chrome		Weight kg	Cap. Lt	Recommended Resistances Erforderliche Widerstände Résistances Conseillées Resistencias Recomendadas				
				$\Delta t=50^\circ\text{C}$		$\Delta t=30^\circ\text{C}$		$\Delta t=50^\circ\text{C}$								
				W	W	W	W	kg	Lt							
090 18 pipes Rohre tubes tubos	SY089050	889	512	471	390 407	230 240	MIN. (close panels) MAX. (open panels)	282 294	162 169	10,1	5	● x	300W 500W 750W			
		889	612	571	472 492	279 291	MIN. (close panels) MAX. (open panels)	341 356	196 204	11,6	5,7	● x				
130 24 pipes Rohre tubes tubos	SY132050	1318	512	471	572 712	311 387	MIN. (close panels) MAX. (open panels)	409 520	215 273	14,2	7,1	● x				
		1318	612	571	692 862	377 469	MIN. (close panels) MAX. (open panels)	495 629	260 331	16,3	8,1	x ●				
175 33 pipes Rohre tubes tubos	SY175050	1747	512	471	725 963	370 492	MIN. (close panels) MAX. (open panels)	524 703	257 345	18,5	9,4	x ●				
		1747	612	571	877 1165	448 595	MIN. (close panels) MAX. (open panels)	634 851	311 418	21,2	10,7	x ●				

kcal/h = 0,86 x Watt

● White & Color  
x Chrome


## Wall fastening systems

Befestigungssysteme an der Wand  
Systèmes d'installation murale  
Sistemas de fijación a la pared

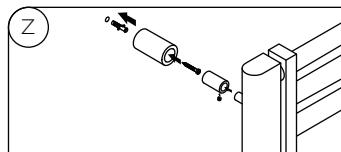


## Radiator body dimensions

Größe des Heizkörpers  
Dimensions du corps chauffant  
Dimensiones del cuerpo calefactor

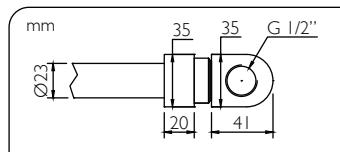

## Installation with heating element and "T"

Installation gemischter Ausführung mit "T"  
Installation avec résistance électrique et "T"  
Instalación con resistencia eléctrica y "T"

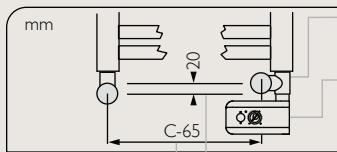


"T" fitting  
T-Stück  
Raccord en "T"  
Conexión en "T"

Resistance with thermostat  
Widerstand mit Thermostat  
Résistance avec thermostat  
Resistencia con termostato

Modification of interaxis with "T" fitting  
Achsabstandänderung durch T-Stück  
Variation interaxe avec raccord "T"  
Variación entreje con rácor en "T"

Measures in mm: A=height B=width C=interaxis  
Abmessungen in mm: A=Höhe B=Breite C=Achsabstand  
Mesures en mm: A=hauteur B=largeur C=entraxe  
Medidas en mm: A=altura B=ancho C=entreje

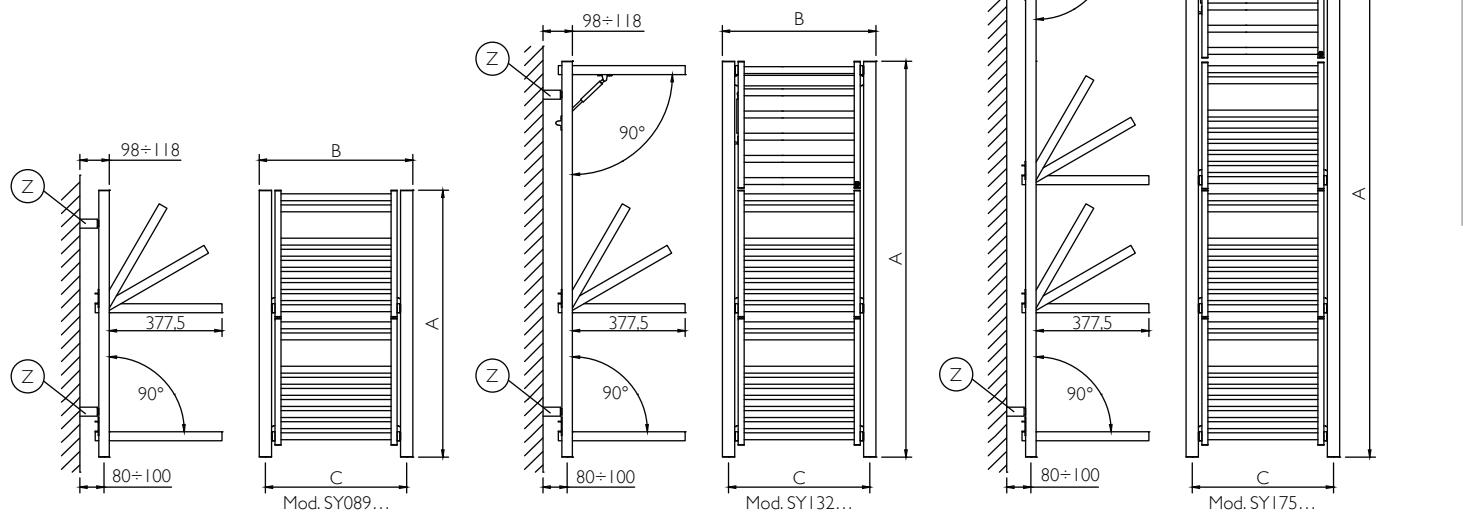

## technical notes

Maximum operating temperature: 90 °C  
Max. Betriebstemperatur: 90° C  
Température maximum de fonctionnement: 90 °C  
Temperatura máx de funcionamiento: 90 °C

Not available for single-pipe system  
Für das Einrohrsystem nicht verfügbar  
Non disponible pour installation mono-tube  
No está disponible para instalación monotubo

Please consult technical notes on Page 323  
Lesen Sie die technischen Daten auf Seite 325  
Consulter renseignements techniques détaillés à la Pag.327  
Consulte las informaciones técnicas detalladas Pag.329

Maximum operating pressure: 500 kPa  
Max. Betriebsdruck: 500 kPa  
Pression maximum de fonctionnement: 500 kPa  
Presión máx de funcionamiento: 500 kPa

Wall fastening systems are white for "9010" version, chromed for "chrome" & "colors" versions  
Die Befestigungselemente sind für die Ausführung "9010" weiß und für Ausführungen "chrome & colours" verchromt  
Les systèmes d'installation sont blancs pour la version "9010", chromés pour les versions "chrome" & "colors"  
Los sistemas de fijacion son blancos para la versión "9010", chromados para las versiones "chrome" & "colors"





# DELTACALOR

# Company profile

## Quality made in Italy

The company was founded in the mid-nineties with a traditional handicraft steel towel rail production. In 2002 the company was transformed into a real industrial reality, following the acquisition of an important group in view of the plumbing and heating sector led by CEO Giovanni Pastorino who decides to revive the company renewing its product range with new ranges of hydraulic, mixed and electrical steel towel warmers and radiators with exclusive technology and design. Deltacalor is strongly characterized by a 360° approach that incorporates technology, practicality and aesthetics. The constant Research and Development on materials, shapes, finishes and processes leads the company to the launch of major patented products, tangible evidence of real and concrete innovations.

Not only the heating elements, but also expression of an innate attitude in the search of the best way to provide comfort and well-being at the service of man. High functionality, energy saving, easy installation, high quality are, in fact, the advantages of a production able to meet and anticipate the needs of designers, architects, installers and end users.






DELTACALOR

# Company profile

## Production takes place in Italy

Production takes place in Italy, in the state of the art plant of CalolzioCorte (LC), on a surface of approximately 10,000 sqm. We use the most innovative and advanced production methods: from welding to painting, to a well established quality control system based on the highest market standards. Production know-how is one of Deltacalor strengths: the company can produce a high number of parts using highly automated systems, but is also capable of meeting the different degrees of customisations that the market requires. All this, with the utmost attention to process control, ensured by a team of experienced professionals.

Deltacalor takes advantage of a young and dynamic workforce of 50 employees, capable of meeting all the needs of our customers, and ready to take on the challenges of the market. This is the winning combination of the company that always ensures precise and timely service.

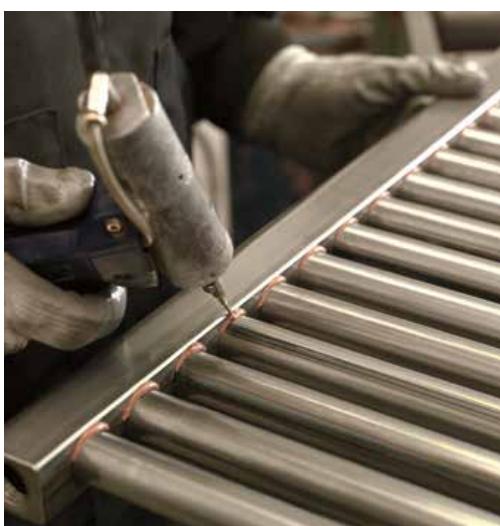

# color chart

9010  
Pure white



Chrome



## colors

Non considerare i colori perfettamente fedeli per limiti di stampa e illuminazione.

Do not consider colors as exactly trustable because of printing and light limits.

Die Farben sind wegen licht und druckbeschräkungen nicht genau zu betrachten.

Ne pas considérer les couleurs comme exactement correspondants suite à limites de imprimerie et de lumière.

No tener en consideracion los colores como perfectamente igual para limitaciones de imprenta y de luz.

### PASTELS

9016  
Traffic white

COARSE



GLOSSY



MATT



1013  
Oyster white



1015  
Light ivory



1019  
Grey beige



7006  
Beige grey



7030  
Stone grey



7047  
Telegrey 4



7040  
Window grey



7043  
Traffic grey B



8019  
Grey brown



9005  
Jet black



### SPECIALS

9006  
White aluminium

COARSE



GLOSSY



MATT



9007  
Grey aluminium



7048  
Pearl mouse grey



1  
Quartz cream



2  
Quartz sand



3  
Quartz stone



4  
Quartz sugar paper



5  
Corten steel



6  
Quartz gray



7  
Quartz black

