

right



right



right





Right

Technical data

	Ref.	A mm	B mm	C mm	Elem. n.	White & Colors			Chrome & Galvanics			Weight kg	Cap. It	Esp. "n"
						$\Delta t = 50^\circ$ W	$\Delta t = 30^\circ$ W	Heater for mixed W	$\Delta t = 50^\circ$ W	$\Delta t = 30^\circ$ W	Heater for mixed W			
820	RG082038	823	380	350	14	357	196	300				7,1	3,3	1,16
	RG082048	823	480	450	14	416	227	300				7,7	3,7	1,17
	RG082053	823	530	500	14	455	249	300				8,3	4,0	1,18
	RG082058	823	580	550	14	495	271	500				9,0	4,4	1,19
1320	RG132038	1322	380	350	22	564	309	500				11,2	5,2	1,16
	RG132048	1322	480	450	22	656	359	500				12,2	5,8	1,17
	RG132053	1322	530	500	22	718	393	750				13,2	6,4	1,18
	RG132058	1322	580	550	22	780	427	750				14,2	6,9	1,19
1770	RG177038	1770	380	350	29	747	409	750				14,8	6,9	1,16
	RG177048	1770	480	450	29	868	475	750				16,1	7,7	1,17
	RG177053	1770	530	500	29	950	519	1000				17,5	8,4	1,18
	RG177058	1770	580	550	29	1032	564	1000				18,8	9,1	1,19


kcal/h = 0,86 x Watt

WALL FASTENING SYSTEMS

Fissaggi a parete

Systèmes d'installation murale

Sistemas de fijación a la pared

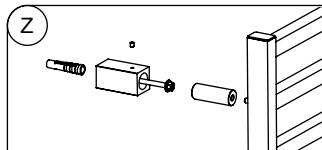


RADIATOR BODY DIMENSIONS

Dimensioni corpo

Dimensions du corps chauffant

Dimensiones del cuerpo calefactor

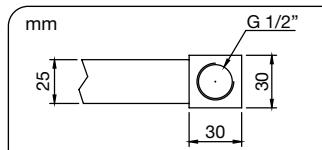


INSTALLATION WITH HEATER AND "T"

Installazione versione mista con "T"

Installation avec résistance électrique et "T"

Instalación con resistencia eléctrica y "T"

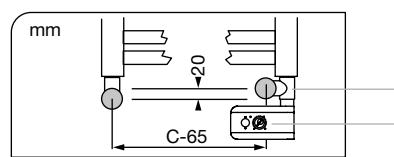


Raccordo a "T"
"T" fitting
Raccord en "T"
Conexión en "T"


Resistenza con termostato
Resistance with thermostat
Résistance avec thermostat
Resistencia con termostato

A = altezza; B = larghezza; C = interasse
A = height; B = width; C = interaxis
A = hauteur; B = largeur; C = entraxe
A = altura; B = ancho; C = entre ejes


[mm]

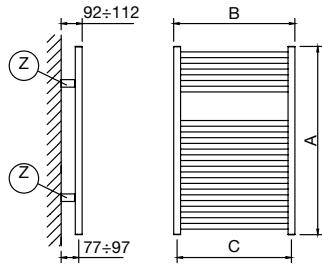

Mod. RG0820...

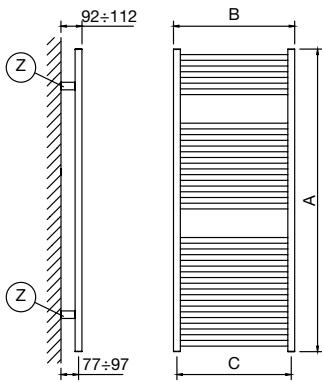

Mod. RG1320...

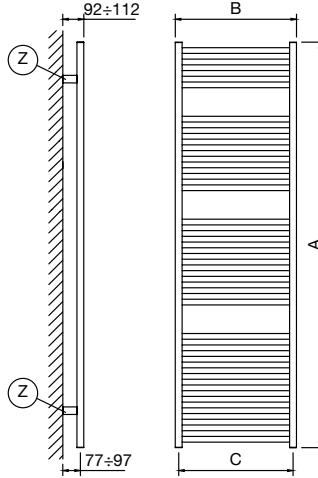

Mod. RG1770...

TECHNICAL NOTES

Temperatura max di esercizio: 90 °C

Maximum operating temperature: 90 °C

Température maximum de fonctionnement: 90 °C

Temperatura máx de funcionamiento: 90 °C

Pressione max di esercizio: 500 kPa

Maximum operating pressure: 500 kPa

Pression maximum de fonctionnement: 500 kPa

Presión máx de funcionamiento: 500 kPa

Per impianto monotubo consultare note tecniche di dettaglio pag. 159

For single pipe installation, please consult technical notes page 161

Pour installation monotube consulter les renseignements techniques détaillés pag. 163

Para instalaciones monotubo consulte las informaciones técnicas detalladas pag. 165



White
Standard
Deltacolor white



Chrome



Pastels
Coarse or Matt

9016
Traffic white



1013
Oyster white



1019
Grey beige



7006
Beige grey




7030
Stone grey



7047
Telegrey 4




7040
Window grey



7043
Traffic grey B



9005
Jet black




Specials
Coarse



7048
Pearl mouse grey



2
Quartz sand



6
Quartz gray

by
Andrea Castiglioni



10
Army



11
Petrol



12
Laguna



13
Balena



14
Rouille

Plate Lux
(Inox Steel Cover)



Flowered



Gold mirror



Black mirror



Copper mirror

Galvanics

Glossy or Matt



British Gold



Bronze Copper



Astana Brass

colors

Non considerare i colori perfettamente fedeli per limiti di stampa e illuminazione.

Do not consider colors as exactly trustable because of printing and light limits.

Ne pas considérer les couleurs comme exactement correspondantes suite à limites de imprimerie et de lumière.

No tener en consideracion los colores como perfectamente igual para limitaciones de impresión y de luz.




DELTACALOR

Company profile

Quality made in Italy

The company was founded in the mid-nineties with a traditional handicraft steel towel rail production. In 2002 the company was transformed into a real industrial reality, following the acquisition of an important group in view of the plumbing and heating sector led by CEO Giovanni Pastorino who decides to revive the company renewing its product range with new ranges of hydraulic, mixed and electrical steel towel warmers and radiators with exclusive technology and design. Deltacalor is strongly characterized by a 360° approach that incorporates technology, practicality and aesthetics. The constant Research and Development on materials, shapes, finishes and processes leads the company to the launch of major patented products, tangible evidence of real and concrete innovations.

Not only the heating elements, but also expression of an innate attitude in the search of the best way to provide comfort and well-being at the service of man. High functionality, energy saving, easy installation, high quality are, in fact, the advantages of a production able to meet and anticipate the needs of designers, architects, installers and end users.

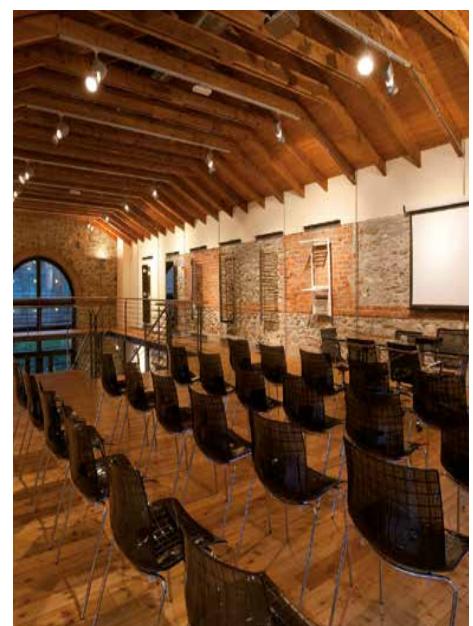



DELTACALOR

Company profile

Production takes place in Italy

Production takes place in Italy, in the state of the art plant of CalolzioCorte (LC), on a surface of approximately 10,000 sqm. We use the most innovative and advanced production methods: from welding to painting, to a well established quality control system based on the highest market standards. Production know-how is one of Deltacalor strengths: the company can produce a high number of parts using highly automated systems, but is also capable of meeting the different degrees of customisations that the market requires. All this, with the utmost attention to process control, ensured by a team of experienced professionals.

Deltacalor takes advantage of a young and dynamic workforce of 50 employees, capable of meeting all the needs of our customers, and ready to take on the challenges of the market. This is the winning combination of the company that always ensures precise and timely service.

