

flyline 1

vertical



flyline



flyline 2

vertical



flyline 1

horizontal



flyline 2

horizontal






technical data

flyline vertical single

Measures in mm: A=height B=width C=interaxis
 Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
 Mesures en mm: A=hauteur B=largeur C=entraxe
 Medidas en mm: A=altura B=ancho C=entre eje



Wall fastening systems

Befestigungssysteme an der Wand
 Systèmes d'installation murale
 Sistemas de fijación a la pared



Radiator body dimensions

Größe des Heizkörpers
 Dimensions du corps chauffant
 Dimensiones del cuerpo calefactor

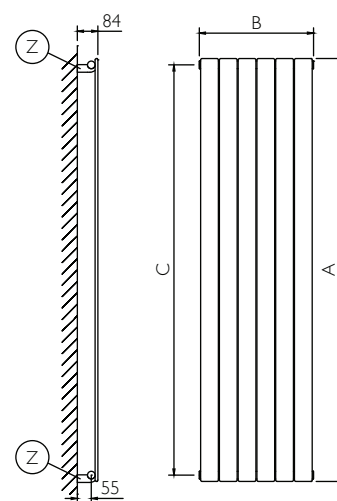


configurations connections







Standard configurations.

Standard-Konfiguration.
 Configuration standard.
 conexiones estándar.



Special configurations available upon request at the order; without surcharge.

Kundenspezifische Konfigurationen auf Wunsch bei der Bestellung verfügbar; ohne Aufpreis
 Configurations spéciales disponibles à la demande à la commande, sans supplément.
 Versiones especiales disponibles previa solicitud a la hora de hacer el pedido, sin recargo.



Specify the input (right or left) - Bitte die Förderleistung angeben (rechts oder links) - Spécifier la réentrée (droite ou gauche) - Especificar la entrada (derecha o izquierda)

	Ref.	A	B	C	Elem.	White & Colors		Weight	Cap.
						Δt=50°C	Δt=30°C		
		mm	mm	mm	n.	W	W	kg	Lt
600 height höhe hauteur altura	FLIV060005	600	376	550	5	245	133	6,3	2,1
	FLIV060006	600	450	550	6	294	159	7,5	2,5
	FLIV060007	600	524	550	7	343	186	8,8	2,9
	FLIV060008	600	598	550	8	392	212	10,0	3,3
	FLIV060009	600	672	550	9	441	239	11,3	3,7
	FLIV060010	600	746	550	10	490	265	12,5	4,1
	FLIV060012	600	894	550	12	588	319	15,0	4,9
	FLIV060016	600	1190	550	16	784	425	20,0	6,6
	FLIV060020	600	1486	550	20	980	531	25,0	8,2
	FLIV060024	600	1782	550	24	1176	637	30,0	9,8
900 height höhe hauteur altura	FLIV090003	900	228	850	3	210	114	5,4	1,7
	FLIV090005	900	376	850	5	350	190	9,0	2,9
	FLIV090006	900	450	850	6	420	228	10,7	3,4
	FLIV090007	900	524	850	7	490	265	12,5	4,0
	FLIV090008	900	598	850	8	560	303	14,3	4,6
	FLIV090009	900	672	850	9	630	341	16,1	5,1
	FLIV090010	900	746	850	10	700	379	17,9	5,7
	FLIV090012	900	894	850	12	840	455	21,5	6,8
	FLIV090016	900	1190	850	16	1120	607	28,6	9,1
	FLIV090020	900	1486	850	20	1400	758	35,8	11,4
	FLIV090024	900	1782	850	24	1680	910	43,0	13,7



technical data

flyline vertical single

	Ref.	A	B	C	Elem.	White & Colors		Weight	Cap.
						$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$		
		mm	mm	mm	n.	W	W	kg	Lt
1200 height höhe hauteur altura	FLIVI20003	1200	228	1150	3	276	150	7,0	2,2
	FLIVI20005	1200	376	1150	5	460	249	11,7	3,7
	FLIVI20006	1200	450	1150	6	552	299	14,0	4,4
	FLIVI20007	1200	524	1150	7	644	349	16,3	5,1
	FLIVI20008	1200	598	1150	8	736	399	18,6	5,8
	FLIVI20009	1200	672	1150	9	828	449	21,0	6,6
	FLIVI20010	1200	746	1150	10	920	498	23,3	7,3
	FLIVI20012	1200	894	1150	12	1104	598	28,0	8,8
	FLIVI20016	1200	1190	1150	16	1472	797	37,3	11,7
	FLIVI20020	1200	1486	1150	20	1840	997	46,6	14,6
	FLIVI20024	1200	1782	1150	24	2208	1196	55,9	17,5
1500 height höhe hauteur altura	FLIVI50003	1500	228	1450	3	339	184	8,6	2,7
	FLIVI50005	1500	376	1450	5	565	306	14,4	4,5
	FLIVI50006	1500	450	1450	6	678	367	17,2	5,3
	FLIVI50007	1500	524	1450	7	791	429	20,1	6,2
	FLIVI50008	1500	598	1450	8	904	490	23,0	7,1
	FLIVI50009	1500	672	1450	9	1017	551	25,8	8,0
	FLIVI50010	1500	746	1450	10	1130	612	28,7	8,9
	FLIVI50012	1500	894	1450	12	1356	735	34,4	10,7
	FLIVI50016	1500	1190	1450	16	1808	979	45,9	14,2
	FLIVI50020	1500	1486	1450	20	2260	1224	57,4	17,8
	FLIVI50024	1500	1782	1450	24	2712	1469	68,9	21,4
1800 height höhe hauteur altura	FLIVI80003	1800	228	1750	3	402	218	10,2	3,2
	FLIVI80005	1800	376	1750	5	670	363	17,1	5,3
	FLIVI80006	1800	450	1750	6	804	436	20,5	6,3
	FLIVI80007	1800	524	1750	7	938	508	23,9	7,4
	FLIVI80008	1800	598	1750	8	1072	581	27,3	8,4
	FLIVI80009	1800	672	1750	9	1206	653	30,7	9,5
	FLIVI80010	1800	746	1750	10	1340	726	34,1	10,5
	FLIVI80012	1800	894	1750	12	1608	871	40,9	12,6
	FLIVI80016	1800	1190	1750	16	2144	1161	54,6	16,8
	FLIVI80020	1800	1486	1750	20	2680	1452	68,2	21,0
	FLIVI80024	1800	1782	1750	24	3216	1742	81,8	25,2
2000 height höhe hauteur altura	FLIV200003	2000	228	1950	3	441	239	11,3	3,5
	FLIV200005	2000	376	1950	5	735	398	18,9	5,8
	FLIV200006	2000	450	1950	6	882	478	22,7	7,0
	FLIV200007	2000	524	1950	7	1029	557	26,5	8,1
	FLIV200008	2000	598	1950	8	1176	637	30,2	9,3
	FLIV200009	2000	672	1950	9	1323	717	34,0	10,4
	FLIV200010	2000	746	1950	10	1470	796	37,8	11,6
	FLIV200012	2000	894	1950	12	1764	956	45,4	13,9
	FLIV200016	2000	1190	1950	16	2352	1274	60,5	18,6
	FLIV200020	2000	1486	1950	20	2940	1593	75,6	23,2
	FLIV200024	2000	1782	1950	24	3528	1911	90,7	27,8




technical data

flyline vertical double

Measures in mm: A=height B=width C=interaxis
 Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
 Mesures en mm: A=hauteur B=largeur C=entraxe
 Medidas en mm: A=altura B=ancho C=entre eje



Wall fastening systems

Befestigungssysteme an der Wand
 Systèmes d'installation murale
 Sistemas de fijación a la pared



Radiator body dimensions

Größe des Heizkörpers
 Dimensions du corps chauffant
 Dimensiones del cuerpo calefactor

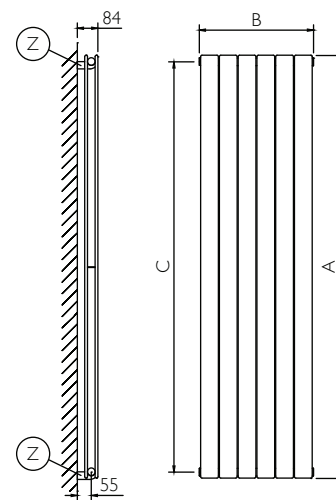


configurations connections







Standard configurations.

Standard-Konfiguration.
 Configuration standard.
 conexiones estándar.



Special configurations available upon request at the order; without surcharge.

Kundenspezifische Konfigurationen auf Wunsch bei der Bestellung verfügbar; ohne Aufpreis
 Configurations spéciales disponibles à la demande à la commande, sans supplément.
 Versiones especiales disponibles previa solicitud a la hora de hacer el pedido, sin recargo.



Specify the input (right or left) - Bitte die Förderleistung angeben (rechts oder links) - Spécifier la rentrée (droite ou gauche) - Especificar la entrada (derecha o izquierda)

Ref.						White & Colors			
		A	B	C	Elem.	$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	Weight	Cap.
		mm	mm	mm	n.	W	W	kg	Lt
600 height höhe hauteur altura	FL2V060003	600	228	550	3	228	124	7,0	2,5
	FL2V060005	600	376	550	5	380	206	11,7	4,1
	FL2V060006	600	450	550	6	456	247	14,0	4,9
	FL2V060007	600	524	550	7	532	288	16,3	5,7
	FL2V060008	600	598	550	8	608	329	18,6	6,6
	FL2V060009	600	672	550	9	684	371	21,0	7,4
	FL2V060010	600	746	550	10	760	412	23,3	8,2
	FL2V060012	600	894	550	12	912	494	28,0	9,8
	FL2V060016	600	1190	550	16	1216	659	37,3	13,1
	FL2V060020	600	1486	550	20	1520	823	46,6	16,4
	FL2V060024	600	1782	550	24	1824	988	55,9	19,7
900 height höhe hauteur altura	FL2V090003	900	228	850	3	327	177	10,2	3,4
	FL2V090005	900	376	850	5	545	295	17,1	5,7
	FL2V090006	900	450	850	6	654	354	20,5	6,8
	FL2V090007	900	524	850	7	763	413	23,9	8,0
	FL2V090008	900	598	850	8	872	472	27,3	9,1
	FL2V090009	900	672	850	9	981	531	30,7	10,3
	FL2V090010	900	746	850	10	1090	590	34,1	11,4
	FL2V090012	900	894	850	12	1308	709	40,9	13,7
	FL2V090016	900	1190	850	16	1744	945	54,6	18,2
	FL2V090020	900	1486	850	20	2180	1181	68,2	22,8
	FL2V090024	900	1782	850	24	2616	1417	81,8	27,4

technical data

flyline vertical double

	Ref.					White & Colors			
		A	B	C	Elem.	$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	Weight	Cap.
		mm	mm	mm	n.	W	W	kg	Lt
1200 height höhe hauteur altura	FL2V120003	1200	228	1150	3	429	232	13,5	4,4
	FL2V120005	1200	376	1150	5	715	387	22,5	7,3
	FL2V120006	1200	450	1150	6	858	465	27,0	8,8
	FL2V120007	1200	524	1150	7	1001	542	31,5	10,2
	FL2V120008	1200	598	1150	8	1144	620	36,0	11,7
	FL2V120009	1200	672	1150	9	1287	697	40,5	13,1
	FL2V120010	1200	746	1150	10	1430	775	45,0	14,6
	FL2V120012	1200	894	1150	12	1716	930	54,0	17,5
	FL2V120016	1200	1190	1150	16	2288	1239	72,0	23,4
	FL2V120020	1200	1486	1150	20	2860	1549	90,0	29,2
	FL2V120024	1200	1782	1150	24	3432	1859	108,0	35,0
1500 height höhe hauteur altura	FL2V150003	1500	228	1450	3	531	288	16,7	5,3
	FL2V150005	1500	376	1450	5	885	479	27,9	8,9
	FL2V150006	1500	450	1450	6	1062	575	33,5	10,7
	FL2V150007	1500	524	1450	7	1239	671	39,1	12,5
	FL2V150008	1500	598	1450	8	1416	767	44,6	14,2
	FL2V150009	1500	672	1450	9	1593	863	50,2	16,0
	FL2V150010	1500	746	1450	10	1770	959	55,8	17,8
	FL2V150012	1500	894	1450	12	2124	1151	67,0	21,4
	FL2V150016	1500	1190	1450	16	2832	1534	89,3	28,5
	FL2V150020	1500	1486	1450	20	3540	1918	111,6	35,6
1800 height höhe hauteur altura	FL2V180003	1800	228	1750	3	627	340	20,0	6,3
	FL2V180005	1800	376	1750	5	1045	566	33,3	10,6
	FL2V180006	1800	450	1750	6	1254	679	40,0	12,7
	FL2V180007	1800	524	1750	7	1463	793	46,6	14,8
	FL2V180008	1800	598	1750	8	1672	906	53,3	16,9
	FL2V180009	1800	672	1750	9	1881	1019	59,9	19,0
	FL2V180010	1800	746	1750	10	2090	1132	66,6	21,1
	FL2V180012	1800	894	1750	12	2508	1359	79,9	25,3
	FL2V180016	1800	1190	1750	16	3344	1812	106,6	33,8
2000 height höhe hauteur altura	FL2V200003	2000	228	1950	3	693	375	22,2	7,0
	FL2V200005	2000	376	1950	5	1155	626	37,0	11,6
	FL2V200006	2000	450	1950	6	1386	751	44,3	13,9
	FL2V200007	2000	524	1950	7	1617	876	51,7	16,2
	FL2V200008	2000	598	1950	8	1848	1001	59,1	18,6
	FL2V200009	2000	672	1950	9	2079	1126	66,5	20,9
	FL2V200010	2000	746	1950	10	2310	1251	73,9	23,2
	FL2V200012	2000	894	1950	12	2772	1502	88,7	27,8
	FL2V200016	2000	1190	1950	16	3696	2002	118,2	37,1




technical data

flyline horizontal single


Wall fastening systems

Befestigungssysteme an der Wand
Systèmes d'installation murale
Sistemas de fijación a la pared




Radiator body dimensions

Größe des Heizkörpers
Dimensions du corps chauffant
Dimensiones del cuerpo calefactor



Measures in mm: A=height B=width C=interaxis
Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
Mesures en mm: A=hauteur B=largeur C=entraxe
Medidas en mm: A=altura B=ancho C=entre eje

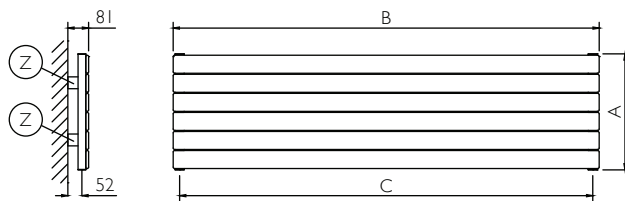


configurations connections




Standard configurations.

Standard-Konfiguration.
Configuration standard.
conexiones estándar.



Special configurations available upon request at the order; without surcharge.

Kundenspezifische Konfigurationen auf Wunsch bei der Bestellung verfügbar; ohne Aufpreis
Configurations spéciales disponibles à la demande à la commande, sans supplément.
Versiones especiales disponibles previa solicitud a la hora de hacer el pedido, sin recargo.

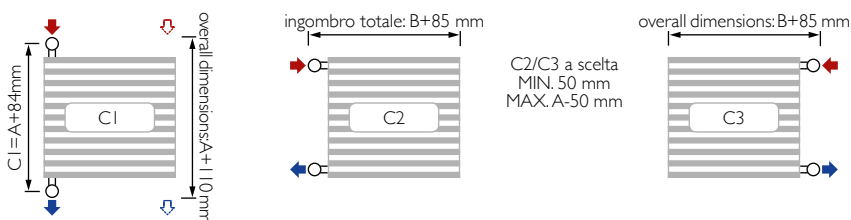

Specify the input (right or left) - Bitte die Förderleistung angeben (rechts oder links) - Spécifier la réentrée (droite ou gauche) - Especificar la entrada (derecha o izquierda)

						White & Colors			
Ref.		B	A	C	Elem.	Δt=50°C	Δt=30°C	Weight	Cap.
		mm	mm	mm	n.	W	W	kg	Lt
600 width Breite largeur anchura	FLIH060005	600	376	550	5	245	133	6,3	2,1
	FLIH060006	600	450	550	6	294	159	7,5	2,5
	FLIH060007	600	524	550	7	343	186	8,8	2,9
	FLIH060008	600	598	550	8	392	212	10,0	3,3
	FLIH060009	600	672	550	9	441	239	11,3	3,7
	FLIH060010	600	746	550	10	490	265	12,5	4,1
	FLIH060012	600	894	550	12	588	319	15,0	4,9
	FLIH060016	600	1190	550	16	784	425	20,0	6,6
	FLIH060020	600	1486	550	20	980	531	25,0	8,2
	FLIH060024	600	1782	550	24	1176	637	30,0	9,8
900 width Breite largeur anchura	FLIH090003	900	228	850	3	210	114	5,4	1,7
	FLIH090005	900	376	850	5	350	190	9,0	2,9
	FLIH090006	900	450	850	6	420	228	10,7	3,4
	FLIH090007	900	524	850	7	490	265	12,5	4,0
	FLIH090008	900	598	850	8	560	303	14,3	4,6
	FLIH090009	900	672	850	9	630	341	16,1	5,1
	FLIH090010	900	746	850	10	700	379	17,9	5,7
	FLIH090012	900	894	850	12	840	455	21,5	6,8
	FLIH090016	900	1190	850	16	1120	607	28,6	9,1
	FLIH090020	900	1486	850	20	1400	758	35,8	11,4
	FLIH090024	900	1782	850	24	1680	910	43,0	13,7



technical data

flyline horizontal single

	Ref.	B	A	C	Elem.	White & Colors		Weight	Cap.
						$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$		
		mm	mm	mm	n.	W	W	kg	Lt
1200 width Breite largeur anchura	FLIH120003	1200	228	1150	3	276	150	7,0	2,2
	FLIH120005	1200	376	1150	5	460	249	11,7	3,7
	FLIH120006	1200	450	1150	6	552	299	14,0	4,4
	FLIH120007	1200	524	1150	7	644	349	16,3	5,1
	FLIH120008	1200	598	1150	8	736	399	18,6	5,8
	FLIH120009	1200	672	1150	9	828	449	21,0	6,6
	FLIH120010	1200	746	1150	10	920	498	23,3	7,3
	FLIH120012	1200	894	1150	12	1104	598	28,0	8,8
	FLIH120016	1200	1190	1150	16	1472	797	37,3	11,7
	FLIH120020	1200	1486	1150	20	1840	997	46,6	14,6
	FLIH120024	1200	1782	1150	24	2208	1196	55,9	17,5
1500 width Breite largeur anchura	FLIH150003	1500	228	1450	3	339	184	8,6	2,7
	FLIH150005	1500	376	1450	5	565	306	14,4	4,5
	FLIH150006	1500	450	1450	6	678	367	17,2	5,3
	FLIH150007	1500	524	1450	7	791	429	20,1	6,2
	FLIH150008	1500	598	1450	8	904	490	23,0	7,1
	FLIH150009	1500	672	1450	9	1017	551	25,8	8,0
	FLIH150010	1500	746	1450	10	1130	612	28,7	8,9
	FLIH150012	1500	894	1450	12	1356	735	34,4	10,7
	FLIH150016	1500	1190	1450	16	1808	979	45,9	14,2
	FLIH150020	1500	1486	1450	20	2260	1224	57,4	17,8
	FLIH150024	1500	1782	1450	24	2712	1469	68,9	21,4
1800 width Breite largeur anchura	FLIH180003	1800	228	1750	3	402	218	10,2	3,2
	FLIH180005	1800	376	1750	5	670	363	17,1	5,3
	FLIH180006	1800	450	1750	6	804	436	20,5	6,3
	FLIH180007	1800	524	1750	7	938	508	23,9	7,4
	FLIH180008	1800	598	1750	8	1072	581	27,3	8,4
	FLIH180009	1800	672	1750	9	1206	653	30,7	9,5
	FLIH180010	1800	746	1750	10	1340	726	34,1	10,5
	FLIH180012	1800	894	1750	12	1608	871	40,9	12,6
	FLIH180016	1800	1190	1750	16	2144	1161	54,6	16,8
	FLIH180020	1800	1486	1750	20	2680	1452	68,2	21,0
	FLIH180024	1800	1782	1750	24	3216	1742	81,8	25,2
2000 width Breite largeur anchura	FLIH200003	2000	228	1950	3	441	239	11,3	3,5
	FLIH200005	2000	376	1950	5	735	398	18,9	5,8
	FLIH200006	2000	450	1950	6	882	478	22,7	7,0
	FLIH200007	2000	524	1950	7	1029	557	26,5	8,1
	FLIH200008	2000	598	1950	8	1176	637	30,2	9,3
	FLIH200009	2000	672	1950	9	1323	717	34,0	10,4
	FLIH200010	2000	746	1950	10	1470	796	37,8	11,6
	FLIH200012	2000	894	1950	12	1764	956	45,4	13,9
	FLIH200016	2000	1190	1950	16	2352	1274	60,5	18,6
	FLIH200020	2000	1486	1950	20	2940	1593	75,6	23,2
	FLIH200024	2000	1782	1950	24	3528	1911	90,7	27,8




technical data

flyline horizontal double


Wall fastening systems

Befestigungssysteme an der Wand
Systèmes d'installation murale
Sistemas de fijación a la pared




Radiator body dimensions

Größe des Heizkörpers
Dimensions du corps chauffant
Dimensiones del cuerpo calefactor



Measures in mm: A=height B=width C=interaxis
Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
Mesures en mm: A=hauteur B=largeur C=entraxe
Medidas en mm: A=altura B=ancho C=entre eje

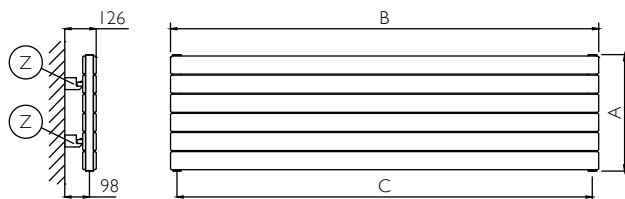


configurations connections





Standard configurations.

Standard-Konfiguration.
Configuration standard.
conexiones estándar.




Special configurations available upon request at the order; without surcharge.

Kundenspezifische Konfigurationen auf Wunsch bei der Bestellung verfügbar; ohne Aufpreis
Configurations spéciales disponibles à la demande à la commande, sans supplément.
Versiones especiales disponibles previa solicitud a la hora de hacer el pedido, sin recargo.



C2/C3 a scelta
MIN. 50 mm
MAX. A-50 mm



Specify the input (right or left) - Bitte die Förderleistung angeben (rechts oder links) - Spécifier la réentrée (droite ou gauche) - Especificar la entrada (derecha o izquierda)

		Ref.	B	A	C	Elem.	White & Colors		Weight	Cap.
							Δt=50°C	Δt=30°C		
							W	W		
		mm	mm	mm	n.			kg	Lt	
600	width	FL2H060003	600	228	550	3	228	124	7,0	2,5
	Breite	FL2H060005	600	376	550	5	380	206	11,7	4,1
	largeur	FL2H060006	600	450	550	6	456	247	14,0	4,9
	anchura	FL2H060007	600	524	550	7	532	288	16,3	5,7
		FL2H060008	600	598	550	8	608	329	18,6	6,6
		FL2H060009	600	672	550	9	684	371	21,0	7,4
		FL2H060010	600	746	550	10	760	412	23,3	8,2
		FL2H060012	600	894	550	12	912	494	28,0	9,8
		FL2H060016	600	1190	550	16	1216	659	37,3	13,1
		FL2H060020	600	1486	550	20	1520	823	46,6	16,4
	FL2H060024	600	1782	550	24	1824	988	55,9	19,7	
900	width	FL2H090003	900	228	850	3	327	177	10,2	3,4
	Breite	FL2H090005	900	376	850	5	545	295	17,1	5,7
	largeur	FL2H090006	900	450	850	6	654	354	20,5	6,8
	anchura	FL2H090007	900	524	850	7	763	413	23,9	8,0
		FL2H090008	900	598	850	8	872	472	27,3	9,1
		FL2H090009	900	672	850	9	981	531	30,7	10,3
		FL2H090010	900	746	850	10	1090	590	34,1	11,4
		FL2H090012	900	894	850	12	1308	709	40,9	13,7
		FL2H090016	900	1190	850	16	1744	945	54,6	18,2
		FL2H090020	900	1486	850	20	2180	1181	68,2	22,8
	FL2H090024	900	1782	850	24	2616	1417	81,8	27,4	



technical data

flyline horizontal double

	Ref.	B	A	C	Elem.	White & Colors		Weight	Cap.
						$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$		
		mm	mm	mm	n.	W	W	kg	Lt
1200 width Breite largeur anchura	FL2HI20003	1200	228	1150	3	429	232	13,5	4,4
	FL2HI20005	1200	376	1150	5	715	387	22,5	7,3
	FL2HI20006	1200	450	1150	6	858	465	27,0	8,8
	FL2HI20007	1200	524	1150	7	1001	542	31,5	10,2
	FL2HI20008	1200	598	1150	8	1144	620	36,0	11,7
	FL2HI20009	1200	672	1150	9	1287	697	40,5	13,1
	FL2HI20010	1200	746	1150	10	1430	775	45,0	14,6
	FL2HI20012	1200	894	1150	12	1716	930	54,0	17,5
	FL2HI20016	1200	1190	1150	16	2288	1239	72,0	23,4
	FL2HI20020	1200	1486	1150	20	2860	1549	90,0	29,2
	FL2HI20024	1200	1782	1150	24	3432	1859	108,0	35,0
1500 width Breite largeur anchura	FL2HI50003	1500	228	1450	3	531	288	16,7	5,3
	FL2HI50005	1500	376	1450	5	885	479	27,9	8,9
	FL2HI50006	1500	450	1450	6	1062	575	33,5	10,7
	FL2HI50007	1500	524	1450	7	1239	671	39,1	12,5
	FL2HI50008	1500	598	1450	8	1416	767	44,6	14,2
	FL2HI50009	1500	672	1450	9	1593	863	50,2	16,0
	FL2HI50010	1500	746	1450	10	1770	959	55,8	17,8
	FL2HI50012	1500	894	1450	12	2124	1151	67,0	21,4
	FL2HI50016	1500	1190	1450	16	2832	1534	89,3	28,5
	FL2HI50020	1500	1486	1450	20	3540	1918	111,6	35,6
1800 width Breite largeur anchura	FL2HI80003	1800	228	1750	3	627	340	20,0	6,3
	FL2HI80005	1800	376	1750	5	1045	566	33,3	10,6
	FL2HI80006	1800	450	1750	6	1254	679	40,0	12,7
	FL2HI80007	1800	524	1750	7	1463	793	46,6	14,8
	FL2HI80008	1800	598	1750	8	1672	906	53,3	16,9
	FL2HI80009	1800	672	1750	9	1881	1019	59,9	19,0
	FL2HI80010	1800	746	1750	10	2090	1132	66,6	21,1
	FL2HI80012	1800	894	1750	12	2508	1359	79,9	25,3
	FL2HI80016	1800	1190	1750	16	3344	1812	106,6	33,8
2000 width Breite largeur anchura	FL2H200003	2000	228	1950	3	693	375	22,2	7,0
	FL2H200005	2000	376	1950	5	1155	626	37,0	11,6
	FL2H200006	2000	450	1950	6	1386	751	44,3	13,9
	FL2H200007	2000	524	1950	7	1617	876	51,7	16,2
	FL2H200008	2000	598	1950	8	1848	1001	59,1	18,6
	FL2H200009	2000	672	1950	9	2079	1126	66,5	20,9
	FL2H200010	2000	746	1950	10	2310	1251	73,9	23,2
	FL2H200012	2000	894	1950	12	2772	1502	88,7	27,8
	FL2H200016	2000	1190	1950	16	3696	2002	118,2	37,1



DELTACALOR

Company profile

Quality made in Italy

The company was founded in the mid-nineties with a traditional handcraft steel towel rail production. In 2002 the company was transformed into a real industrial reality, following the acquisition of an important group in view of the plumbing and heating sector led by CEO Giovanni Pastorino who decides to revive the company renewing its product range with new ranges of hydraulic, mixed and electrical steel towel warmers and radiators with exclusive technology and design. Deltacalor is strongly characterized by a 360° approach that incorporates technology, practicality and aesthetics. The constant Research and Development on materials, shapes, finishes and processes leads the company to the launch of major patented products, tangible evidence of real and concrete innovations. Not only the heating elements, but also expression of an innate attitude in the search of the best way to provide comfort and well-being at the service of man. High functionality, energy saving, easy installation, high quality are, in fact, the advantages of a production able to meet and anticipate the needs of designers, architects, installers and end users.






DELTACALOR

Company profile

Production takes place in Italy


Production takes place in Italy, in the state of the art plant of Calolziocorte (LC), on a surface of approximately 10,000 sqm. We use the most innovative and advanced production methods: from welding to painting, to a well established quality control system based on the highest market standards. Production know-how is one of Deltacalor strengths: the company can produce a high number of parts using highly automated systems, but is also capable of meeting the different degrees of customisations that the market requires. All this, with the utmost attention to process control, ensured by a team of experienced professionals.

Deltacalor takes advantage of a young and dynamic workforce of 50 employees, capable of meeting all the needs of our customers, and ready to take on the challenges of the market. This is the winning combination of the company that always ensures precise and timely service.

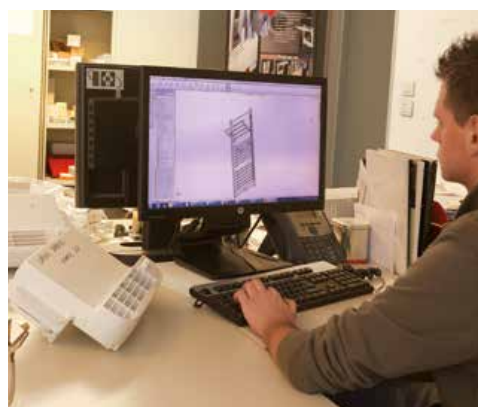

color chart

9010
Pure white



Chrome



colors

Non considerare i colori perfettamente fedeli per limiti di stampa e illuminazione.

Do not consider colors as exactly trustable because of printing and light limits.

Die Farben sind wegen licht und druckbeschränkungen nicht genau zu betrachten.

Ne pas considérer les couleurs comme exactement correspondants suite à limites de imprimerie et de lumière.

No tenir en consideracion los colores como perfectamente igual para limitaciones de imprenta y de luz.

PASTELS

9016
Traffic white

1013
Oyster white

1015
Light ivory

1019
Grey beige

7006
Beige grey

7030
Stone grey

7047
Telegrey 4




7040
Window grey

7043
Traffic grey B



8019
Grey brown

9005
Jet black




COARSE



GLOSSY



MATT



SPECIALS

9006
White aluminium

9007
Grey aluminium

7048
Pearl mouse grey

1
Quartz cream

2
Quartz sand

3
Quartz stone

4
Quartz sugar paper

5
Corten steel

6
Quartz gray

7
Quartz black

COARSE



GLOSSY



MATT

